HAD Girdle Viewer III

USER GUIDE



HAD

HAD Girdle Viewer Parts List





Diamond Size Requirements



g.Rotating Platform for Double-Sided Cone Stage Holder



f.Rotating Platform for Jewellery Holder

| Overview of Stages | | |
|---|------------------|--------------------------------------|
| Stage Name | Type of Diamond | Suggested Use |
| Rotating Platform for Double-Sided Cone Stage Holder | Loose Diamonds | Diamond Carat Size (ct) 0.20-12ct |
| Rotating Platform for Jewellery Holder | Mounted Diamonds | |

Setting Up HAD Girdle Viewer III

- a. Plug the instrument into the power supply
- b. Turn the instrument on by pressing the power button
- c. Turn on flex light, and adjust light angle
- d. Adjust stage height platform, until camera catches diamond girdle information










Loose Diamond

Choose Rotating Platform for Double-Sided Cone Stage Holder (g), and take the best girdle view

- 1. Put Rotating Platform for Double-Sided Cone Stage Holder (g) on Stage Height Platform Adjustment (c)
- 2. Turn on Flex Light(n)
- 3. Put loose diamond as following picture



- 4. Adjust stage height platform (c), to display diamond girdle view on LCD screen
- 5. Rotate diamond stone rotating platform (g), to display diamond girdle inscription on camera
- 6. Rotate Camera Focus Knob (e), to display girdle view clearly on camera

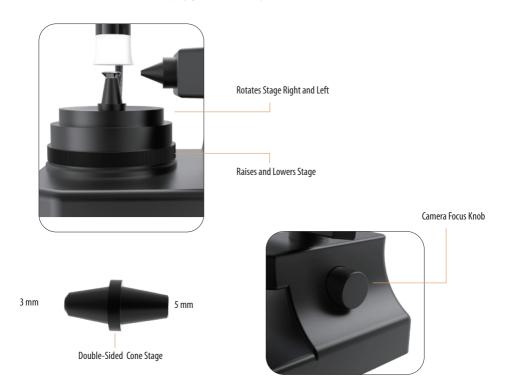

Mounted Diamonds

Choose Rotating Platform for Jewellery Holder (f), and take the best girdle view

- 1. Put Rotating Platform for Jewellery Holde (f) on stage height platform adjustment (c)
- 2. Turn on Flex Light(n)
- 3. Put diamond ring as following picture



- 4. Adjust stage height platform (c), to display diamond girdle view on LCD screen
- 5. Rotate diamond ring rotating platform (f), to display diamond girdle inscription on camera
- 6. Rotate Camera Focus Knob (e), to display girdle view clearly on camera



Important Notice

Claw on ring could cover part of girdle inscription



Product Parameters

| Specifications | | |
|----------------|------------|--|
| Item Code | XWJ-121 | |
| Voltage | 110V-220V | |
| Magnification | 30X-110X | |
| Screen Size | 4.2" | |
| Package Size | 26*23*18cm | |
| Product Weight | 2.3KG | |

Video Link



Manufacturer Information

Company: Sunlin Jewellery Equipment Group (HK)Co.,Ltd

Address: Unit A1 -15 1/F Phasel Hang Fung Industrial Building No.2G Hok Yuen

Street Hung Hom KL HongKong

Email: support@sunlin-group.com
Website: www.sunlin-group.com